


Produktdatenblatt

Ballfangzäune Typ GBZ-ID

(mit Dämpfung)

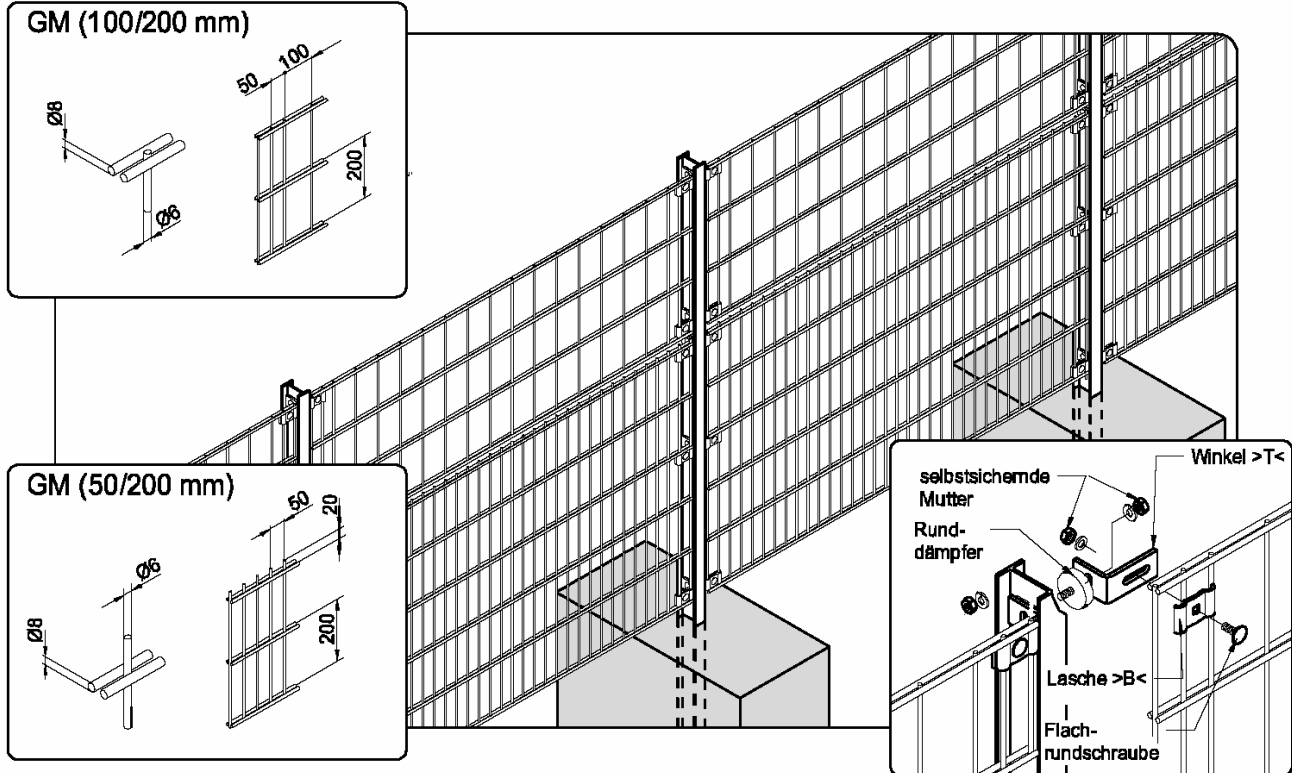

	*2	*3	*4	*5	*6	*7			*2	*3	*4	*5	*6	*7		
Höhe (=Gittermattenhöhe)	3050	4050	5100	6100	7150	8150	mm	Höhe (=Gittermattenhöhe)	3050	4050	5100	6100	7150	8150	mm	
Pfostenlänge	3700	4800	5920	6920	7970	8970	mm	GM 200/05 m.Ü.	1	1	1	1	1	1		
Pfostenprofil	IPE 80	IPE 80	IPE 100	IPE 100	IPE 120	IPE 120		GM 100/10 o.Ü.	1	-	1	-	1	-	Stk.	
Befestigungselemente:							Stk.	GM 200/10 o.Ü.	-	1	1	2	2	3		
-Runddämpfer	7	8	11	12	15	16										
-Winkel >T<	14	16	22	24	30	32										
-Lasche >B< *	14	16	22	24	30	32										
-Schraube M10x30	14	16	22	24	30	32										
-Mutter M10 - 985	28	32	44	48	60	64										
-Scheibe A10.5	28	32	44	48	60	64										
Fundament Länge	850	900	1050	1100	1250	1300	mm									
Breite	400	500	500	600	600	600										
Tiefe	800	800	800	800	800	800										
*1																

*1 Fundamentgrößen gemäß statischen Vorgaben

*2 Bestehend aus 1 GM 2030 mm + 1 GM 1000 mm

*3 Bestehend aus 1 GM 2030 mm + 1 GM 2000 mm

*4 Bestehend aus 1 GM 2030 mm + 1 GM 2000 mm + 1 GM 1000 mm

*5 Bestehend aus 1 GM 2030 mm + 2 GM 2000

*6 Bestehend aus 1 GM 2030 mm + 2 GM 2000 und 1 GM 1000 mm

*7 Bestehend aus 1 GM 2030 mm + 3 GM 2000

